

Silhoflex Stacking Chair

Н

WT



Model

CH-SI-SK-G-10	13.75"	12.5"	10"	7
CH-SI-SK-G-12	13.75"	12.5"	12"	7
CH-SI-SK-G-14	13.75"	12.5"	14"	8
CH-SI-SK-G-16	13.75"	15.5"	16"	9
CH-SI-SK-G-18	17″	15.5"	18"	11
CH-SI-SK-G-19	17"	15.5"	19"	12
CH-SI-SK-G-AB Adjustable	13.75"	12.5"	14-18"	12
CH-SI-SK-G-06 Floor Chair	13.75"	12.5"	6"	6
CH-SI-SK-C-14 w/casters	13.75"	12.5"	14"	9
CH-SI-SK-C-16 w/casters	13.75"	12.5"	16"	10
CH-SI-SK-C-18 w/casters	17"	15.5"	18"	11
CH-SI-BB-G-18 w/book basket	17"	15.5"	18"	12

SPECIFICATIONS

Columbia's Silhoflex Stacking provides optimum style, strength, posture and dependability. Our rugged chairs can be used for classrooms, meeting rooms, or wherever dependability is demanded. Stacks 20 high.

- 1 1/8" diameter, 18 gauge steel tubing
- 360° weld at all joining locations
- Nickel chrome plate or powder coat finish

- Polypropylene constructed into a one-piece, anti-static shell
- Modern rib-less smooth back design with built in lumbar support and strategically located hand hole
- Computer aided design produces optimum strength at transition area between seat and back with nearly .750" of wall thickness in critical areas

Seat Height

6" - 18"

Tubing

- 1008 -1018 CRS Platable steel
- Tubing 18 gauge





Columbia glide options - Armored Glide, steel, felt base. Q Ball glides available upon request.


- Interchangeable base options in 7/8" to 1" diameter swivel glides with hardened internal steel gripper
- 1/2" high shoulder glide firmly attaches to tubing
- Maximum 40°- swivel range
- Armor Tip lubricant repels wax, detergents, and water

Assembly

- Steel riveted in several locations
- Seat shell mechanically fastened directly to the frame



with Casters with Basket Floor Chair

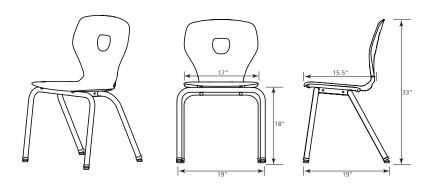

All Silhoflex chairs pass CAL133 testing without any added harmful chemicals.







Silhoflex Soft Plastic Color Options



All non-standard colors subject to minimum quantities and upcharges.

Frame Finish Options



[†]Spec Flek All non-standard colors subject to minimum quantities and upcharges.

